


# SCF Anticorrosive Shaft

Material : SUJ2(high carbon chromium steel)  
 Treatment : Heat treatment ground, chromium plated and polished  
 Hardness : HRC 62±2

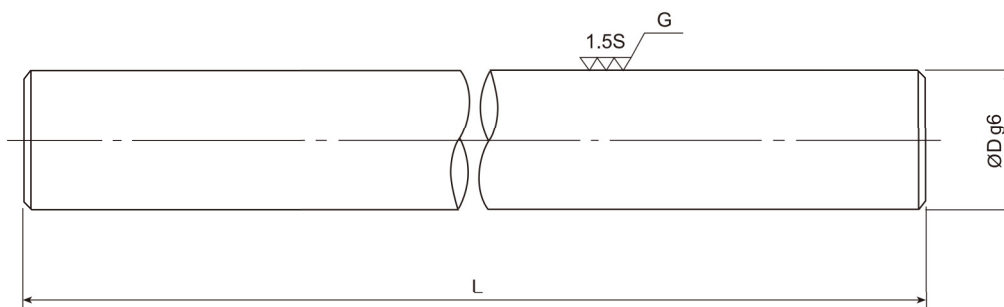

Diameter D	Model No.	Diameter tolerance $\mu\text{m}$	Max Length	Depth of effective hardened layer	Weight	Diameter D	
mm	SCF	g6	L mm	mm	kg/m	mm	
8	SCF 8	-5	3000	1.5 and above	0.40	8	
10	SCF 10	-14	3000		0.62	10	
12	SCF 12	-6	4000		0.89	12	
13	SCF 13		4000		1.05	13	
16	SCF 16	-17	4000	2.0 and above	1.58	16	
20	SCF 20	-7	4000		2.47	20	
25	SCF 25		4000		3.85	25	
30	SCF 30	-20	4000	2.5 and above	5.55	30	
35	SCF 35	-9	4000		7.55	35	
40	SCF 40		-25	4000	3.0 and above	9.87	40
50	SCF 50			4000		15.41	50
60	SCF 60	-10	4000	22.20		60	
80	SCF 80	-29	4000	39.46		80	
100	SCF100	-12 -34	4000	61.66	100		